



## J23系列开式可倾压力机 J23OPEN TILING TYPE PRESS MACHINE

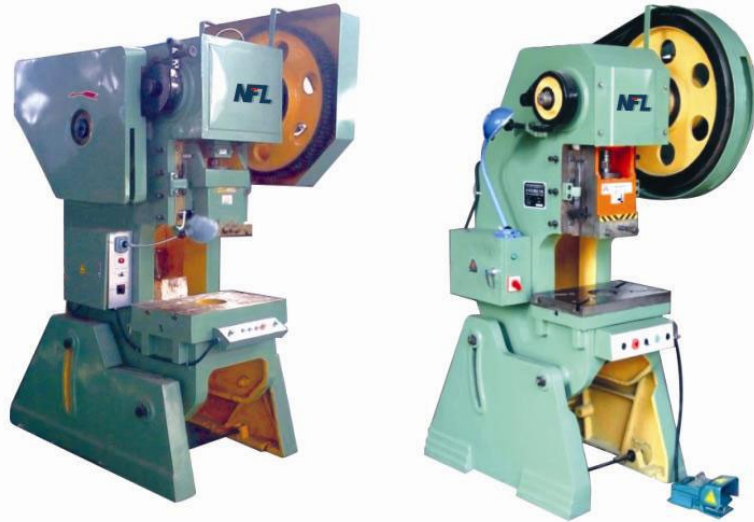

## J21S系列固定台深喉颈压力机 J21S FIXED TABLE DEEP THROAT PRESS

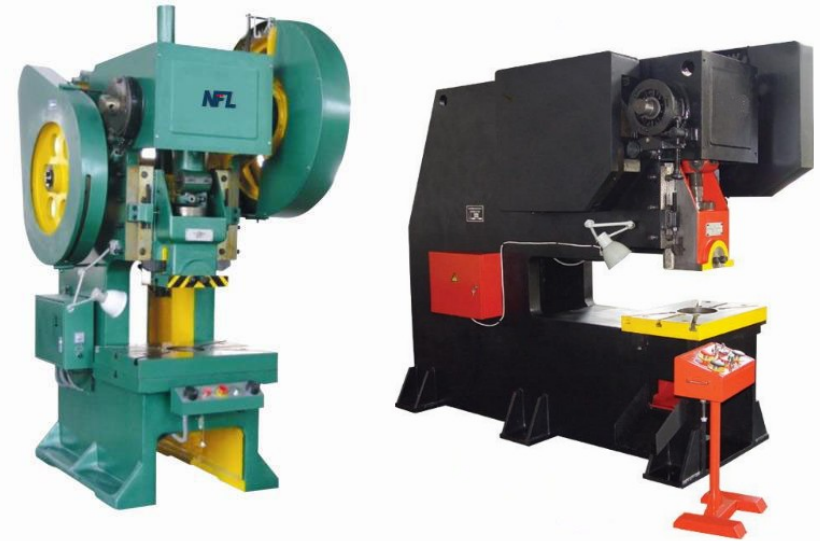

参数名称	Parameter name	单位(unit)	160	125	100	80	63	40	25	16	10	
滑块公称压力	Slider to the nominal pressure	KN	1600	1250	1000	800	630	400	250	160	100	
公称压力行程	Nominal pressure stroke	mm	12	8	9	8	6	6	5	5	4	
滑块行程	Slide stroke	mm	140	140	130	115	110	100	70	60	50	
滑块行程次数	Number of slide stroke	min <sup>-1</sup>	50	45	45	45	50	55	70	140	145	
最大封闭高度	Maximum closed height of	mm	450	400	380	380	330	300	200	170	150	
封闭高度调节量	Closed height adjustment	mm	120	100	100	80	80	70	40	40	40	
滑块中心线至机身距离	Slider to the machine body distance	mm	380	320	280	250	230	215	180	160	130	
工作台尺寸	Worktable size	前后 around	mm	710	600	540	480	440	400	320	300	240
		左右 About	mm	1120	900	840	750	700	650	525	480	360
工作台落料孔尺寸	Bench off the material pore size	前后 around	mm	340	290	200	250	140	200	160	110	100
		左右 About	mm	530	420	370	340	280	220	220	180	180
		直径 Diameter	mm	450	300	300	290	240	220	200	160	140
滑块底面尺寸	Slider base size	前后 around	mm	370	340	270	250	250	230	170	160	150
		左右 About	mm	510	380	360	320	320	280	230	200	170
横柄孔尺寸	Shank hole size	直径 Diameter	mm	80	60	60	60	60	50	40	35	30
		深度 Depth	mm	80	75	80	80	70	70	60	60	50
机身立柱间距	Distance between the body column	mm	410	450	380	300	300	300	240	220	180	
工作台至导轨距离	The workbench Zhidao rail distance	mm	580	550	510	490	440	400	280	280	255	
垫板厚度	Plate thickness	mm	120	110	100	95	80	75	50	50	50	
机身可倾角	Body can dip		20	20	20	20	20	20	20	30	30	
电机 Motor	功率 Power	KW	15	11	7.5	7.5	4	3	2.2	1.5	1.01	
	转速 Speed	转/min	1440	1440	1440	1440	1440	1440	1440	940	960	
外形尺寸 Dimensions	前后 around	mm	2175	2370	1800	1790	1700	1500	1200	1130	610	
	左右 About	mm	1288	1740	1360	1320	1280	1150	900	750	880	
	高度 Height	mm	3047	3240	2650	2550	2470	2370	2050	1890	1660	

参数名称	Parameter name	单位(unit)	100	80	63	40	25	16
滑块公称压力	Slider to the nominal pressure	KN	1000	800	630	400	250	160
公称压力行程	Nominal pressure stroke	mm	10	8	6	6	5	5
滑块行程	Slide stroke	mm	130	115	110	100	70	60
滑块行程次数	Number of slide stroke	min <sup>-1</sup>	45	45	50	55	70	100
最大封闭高度	Maximum closed height of	mm	380	380	330	300	200	170
封闭高度调节量	Closed height adjustment	mm	80	80	80	70	60	40
滑块中心线至机身距离	Slider to the machine body distance	mm	500-700	500-700	500-700	500-700	500-700	500-700
工作台尺寸	前后 around	mm	600	540	450	400	330	320
	左右 About	mm	900	820	720	650	530	490
工作台落料孔尺寸	前后 around	mm	250	250	140	280	160	150
	左右 About	mm	340	340	280	200	220	200
	直径 Diameter	mm	290	290	200	220	200	180
滑块底面尺寸	前后 around	mm	360	250	220	230	170	140
	左右 About	mm	320	320	300	280	230	180
横柄孔尺寸	直径 Diameter	mm	60	60	60	50	40	35
	深度 Depth	mm	80	80	70	70	60	60
机身立柱间距	Distance between the body column	mm	300	300	320	300	240	160
工作台至导轨距离	The workbench Zhidao rail distance	mm	490	490	440	380	280	250
垫板厚度	Plate thickness	mm	95	90	80	80	50	50
机身可倾角	Body can dip		/	/	/	/	/	/
电机 Motor	功率 Power	KW	7.5	7.5	4	3	2.2	1.5
	转速 Speed	转/min	1440	1440	1440	1420	1420	960